COMMUNITY BOARD APPLICATION PACKAGE

Business Name: VILLAGE SQUARE PIZZA III INC **Doing Business As:** VILLAGE SQUARE PIZZA

Cafe Location: 1200 LEXINGTON AVENUE, NEW YORK, NY 10028

Application Number: 20260923010001 **License Type:** Roadway

Filing Date: 11/9/2026

Response Deadline: 12/9/2026

DOH Food Service Establishment Permit (FSEP) Information

FSEP#: 50131448
Expiration Date: 01/31/2028
DOHMH Status: CURRENT
Business Address: 1200 LEXINGTON AVENUE, NEW YORK, NY 10028
Venue Type: Restaurant (no bar)
Last Update from DOH: 11/10/2026

Restaurant Contact Information

Phone: (917) 409-1272
Email Address: villagesquarepizza@gmail.com

DOS Information

DOS ID#: 5966197
Process Name: The Village Square Pizza III Inc
DOS Address: 147 AVENUE A New York, NY 10009

NYS Liquor Authority Information

NYSLA Serial No: N/A
License Type: N/A
Name of Licensee: N/A
Title of Representative: N/A
Name of Certificate Holder: N/A

Business Hours

These are the operating hours of the restaurant, not necessarily the hours the cafe will be open.

Sunday	11:00 AM	-	09:00 PM
Monday	11:00 AM	-	09:00 PM
Tuesday	11:00 AM	-	09:00 PM
Wednesday	11:00 AM	-	09:00 PM
Thursday	11:00 AM	-	09:00 PM
Friday	11:00 AM	-	11:00 PM
Saturday	11:00 AM	-	11:00 PM

DINING OUT NYC — Community Board Feedback Form

This form is to be used by community boards during the cafe review process. For information pertaining to specific cafe design requirements, visit the Dining Out NYC website for program legislation, rules, and Setup Guides.

Roadway Cafe Setup Feedback for VILLAGE SQUARE PIZZA III INC:

Comments related to the cafe's **physical footprint and dimensions:**

Comments related to **pedestrian flow (**i.e. visibility, safety, potential crowding):

Comments related to potential conflicts with **existing curb use** (i.e. planters, bike racks, bus stops):

Overall recommendation for the cafe setup:

Suggested modifications related to the above referenced application:

Community Board Authorizing Name	Community Board Authorizing Signature	Date

Frontage 1 Site Photos: On LEXINGTON AVENUE From EAST 82 STREET To EAST 83 STREET











SECTION 1: Site Plan


- This Site Plan form is required to be uploaded in the **"Roadway Site Plan"** field of your online application.
- Refer to the How to Apply page in the Dining Out NYC website for more information about the application process.

Identify Permitted Parking Location:

- Identify the Parking Sign in front of or around the area where your roadway setup would be located.
- Roadway cafes can only be placed in:
  1. Parking spaces, which include: metered and non-metered spaces, commercial parking, alternate side parking, angled parking, and seasonally restricted parking.
  2. Loading areas, including loading only, truck loading, hotel loading, and no parking zones.
  3. Floating Parking Lane- a parking lane that is separated from the curb by a protected bicycle lane that is adjacent to the curb.

P1- Parking Space
P2- Loading Area
P3- Floating Parking Lane

Use the space below to draw or upload your Site Plan representing your cafe perimeters, furniture, and clearances.

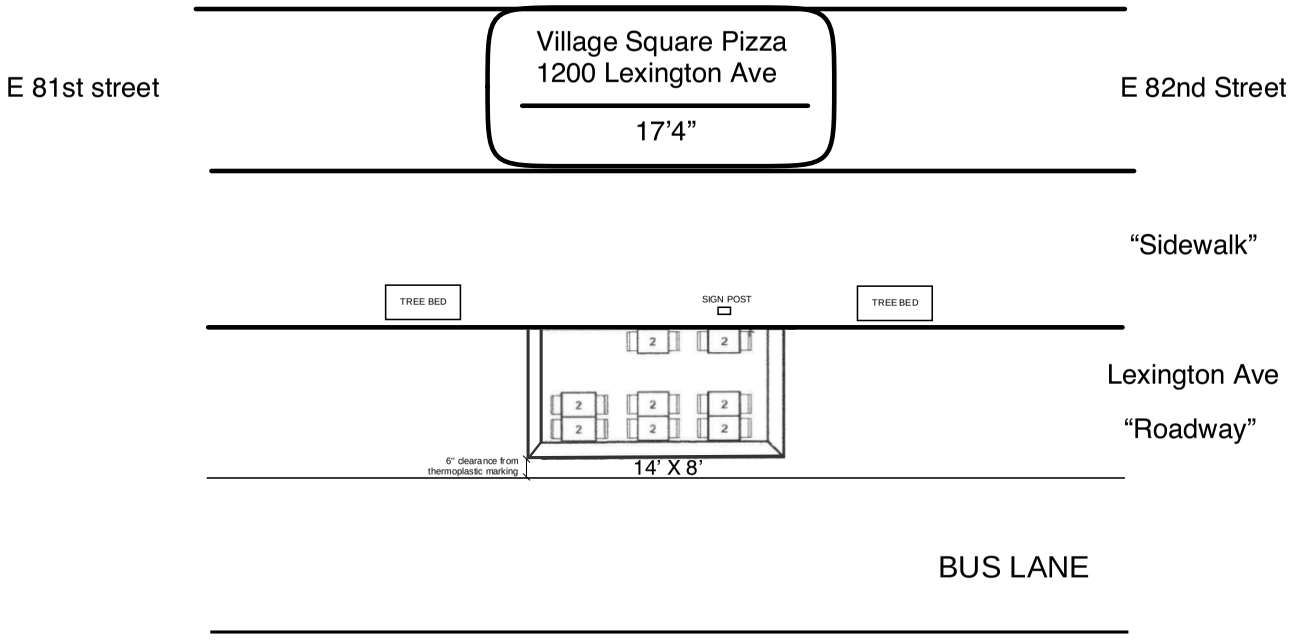

Length of roadway cafe: 14' feet Width of roadway cafe: 8' feet

DINING OUT NYC | NEW YORK CITY DOT | Eric Adams Mayor | Ydanis Rodriguez Commissioner

Roadway Cafe Site Plan Form

Applicant Name: The Village Square Pizza III Inc

Restaurant Name: Village Square Pizza

FSEP Number: 50131448

Drawing Requirements

Food service establishment frontage shown as:
- Line representing the establishment's space facing the sidewalk
- Length
- Label

Street names:
- Labels on each street

Sidewalk shown as:
- Line representing street curb

Roadway shown as:
- Width of curbside lane

Cafe perimeter shown as:
- Lines indicating perimeter
- Length and width

Set-up furniture (tables, chairs, etc.) shown as:
- Lines or symbols at approximate location within setup

Elements (in Section 2 of this form) within 15 feet of cafe perimeter, shown as:
- Lines or symbols
- Distance from cafe perimeter
- Labels

Utility coverings (water/gas valves, and pull boxes) shown as:
- Symbols representing the location within the setup

North arrow

Frontage 1 Roadway Site Plan: On LEXINGTON AVENUE From EAST 82 STREET To EAST 83 STREET

SECTION 2: Required Clearances

- Please provide distances from the following objects.
- Only provide a distance if the listed object is within 15 feet of your proposed setup.
- Refer to the Setup Guides in the Dining Out NYC website for more information regarding clearances.

Elements with minimum 15 feet clearance from roadway cafe:

- ☐ R01- Subway Stair: Open End _____feet
- ☐ R02- Fire Hydrant _____feet

Elements with minimum 10 feet clearance from roadway cafe:

- ☐ R03- Subway Elevator Entrance _____feet
- ☐ R04- FDNY Curb Cut _____feet
- ☐ R05- MTA Curb Cut _____feet

Elements with minimum 5 feet clearance from roadway cafe:

- ☐ R06- Curb Cut _____feet
- ☐ R07- Emergency Exit Hatch _____feet
- ☐ R08- Subway Stair: Closed End _____feet
- ☐ R09- Subway Elevator: Non-Entry _____feet
- ☐ R10- Bus Stop Pole: Non- Approaching Side _____feet
- ☐ R11- CitiBike/Bike Share Station _____feet
- ☐ R12- Bike Corral _____feet
- ☐ R13- Micromobility Station _____feet
- ☐ R14- Drainage Infrastructure _____feet

Elements with minimum 3 feet clearance from roadway cafe:

- ☐ R15- Elevated Train Infrastructure _____feet
- ☐ R16- Transformer Vault _____feet

Elements with minimum 1 foor and 6 inches clearance from roadway cafe:


- ☐ R17- Vent Infrastructure: utility vent poles, vent grates, subway grates _____feet
- ☐ R18- Manholes _____inches

Elements with minimum 6 inches clearance from roadway cafe:

- ■ R19- Thermoplastic Marking 0.5 feet

Roadway cafe distance from crosswalks:

- ☐ R20- Adjacent to non-approaching side of crosswalk (min. 8 foot distance) _____feet
- ☐ R21- Adjacent to approaching (stopping) side of crosswalk (min. 20 foot distance) _____feet
- ☐ R22- No crosswalk present (maintain 20 feet from curb line of intersecting street) _____feet

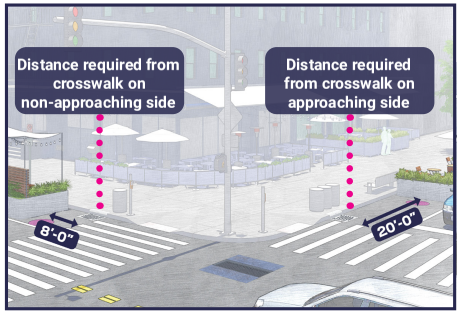

☐ Check this box if none of the objects listed above are within 15 feet of the proposed setup.

SECTION 3: Material Requirements

- Please indicate which of the following materials will be part of your roadway cafe by checking the box next to the category. If applicable, please confirm the materials comply with the Dining Out NYC requirements.
- Refer to the Setup Guides in the Dining Out NYC website for more information regarding materials.

Materials Checklist:

Required

■ **Barriers (All of the following must be met)**

- ■ Maintained on all sides of the cafe except the side fronting the ground floor restaurant.
- ■ Not permanently affixed to the roadway.
- ■ 30-42 inches tall (excluding planting), and at least 4 inches in width.
- ■ Barriers are interconnected with each other.
- ■ Any cladding over the barriers is securely fastened or affixed.
- ■ Minimum 4 inches wide reflective strip on each barrier on the outward facing side.
- ■ Water-filled with a minimum of 150 pounds per linear foot of barrier length.

Optional - Only check the material categories you intend to use in your roadway cafe

☐ **Flooring (if using, all of the following must be met)**

- ☐ Durable, lightweight, easily removable, mold-resistant, elevated from the ground level to allow for drainage, and removable to allow for cleaning.
- ☐ Flush with the curb line (except if located on a slope, be flush to the greatest extent feasible), and compliant with applicable accessibility requirements.
- ☐ Maintains a 6 inch covered channel between curb and base of flooring to allow for drainage.

☐ **Furnishings (if using, all of the following must be met)**

- ☐ Lightweight and easily movable.

☐ **Vertical Screenings (if using, all of the following must be met)**

- ☐ Located between the barrier and 6 feet above the cafe base or floor.
- ☐ Located on the roadway facing side, does not extend the beyond the perimeter of the roadway cafe, and is not affixed to the outward facing side of barriers.
- ☐ Easily removable, comprised of non-opaque, fire-grade, and wind resistant materials.
- ☐ If within 50 feet of any regulatory or warning signs, does not exceed 46 inches in height.

☐ **Overhead Coverings/ Umbrellas (if using, all of the following must be met)**

- ☐ Minimum of 7 feet and maximum of 10 feet from the base or floor of the roadway cafe.
- ☐ Has a weighted base and any support structures are not affixed to the outward facing side of barriers, are of sufficient size and strength, made of durable materials, and free of defects.
- ☐ Easily removable, comprised of fire-grade and wind resistant materials.
- ☐ If within 50 feet of any regulatory or warning signs, does not exceed 46 inches in height.

☐ **Lighting and Electrical Connections (if using, all of the following must be met)**

- ☐ Any lighting is outdoor rated, properly secured, and lightweight.
- ☐ At least 14 feet above sidewalk, and 18 feet above roadway.
- ☐ Not attached to any City property, including street trees.
- ☐ Electrical work complies with the applicable requirements set forth in DOT's rules and the New York City Electrical Code. Please note that this may require additional permits from DOB or FDNY, and/or approval from the Landmarks Preservation Commission (LPC) as applicable.